


# MIL-PRF-28861 Group A, Class B Alternative Simplified Flow Chart

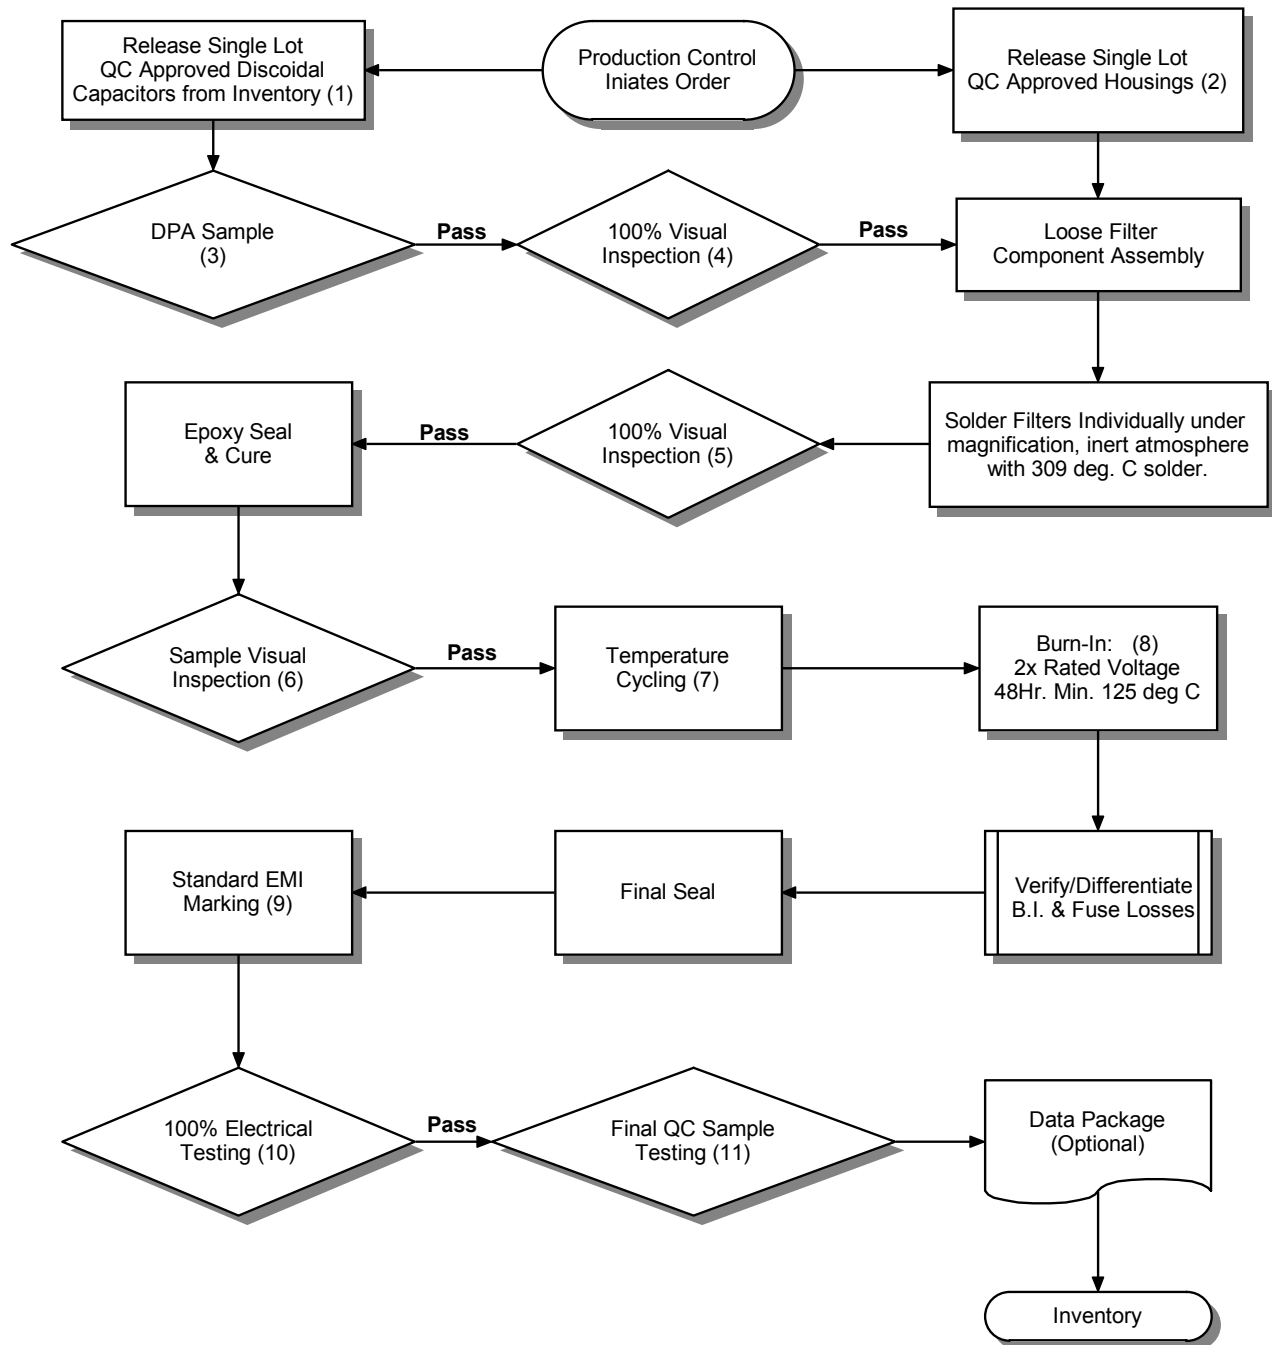

- (1) 100% tested for capacitance, D.F., DWV & IR per MIL-PRF-31033A.
- (2) In accordance with applicable MIL-G-45204 or QQ-S-365.
- (3) DPA in accordance with applicable MIL-PRF-31033A, RS 469.
- (4) In accordance with applicable MIL-PRF-31033A.
- (5) In accordance with applicable MIL-PRF-28861A, MIL-PRF-31033A, EMI F200.
- (6) In accordance with applicable MIL-PRF-28861A, EMI F301.
- (7) Per MIL-STD-202G, Method 107G (test condition A, step 3 @ 125 deg. C.), MIL-PRF-28861A.
- (8) 48 hour burn-in minimum @ 2x rated voltage, 125 deg. C. 168 hour burn-in optional.
- (9) Color dots standard per EMI F401.
- (10) 100% tested for capacitance, D.F., DWV & IR per MIL-PRF-31033A.
- (11) Sample tested for capacitance, D.F., physical measurement, 100% final visual scan.